


## パイプ 最小曲げ半径

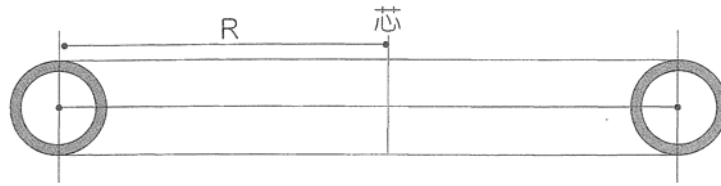

呼び径		外径	(上段) 厚さ t (下段) 曲半径 R											
A	B		t	1.7	2	2.2	2.4							
6	1/8	10.5	t	1.7	2	2.2	2.4							
			R	165	165		165							
8	1/4	13.8	t	2.2	2.3	2.4	3.0							
			R	170	170									
10	3/8	17.3	t	2.3	2.8	3.2								
			R	180		180								
15	1/2	21.7	t	1.9	2.8	3.2	3.7							
			R		180		180							
20	3/4	27.2	t	1.9	2.3	2.8	2.9	3.4	3.9					
			R			180	180		180					
25	1	34.0	t	2.3	3.2	3.4	3.9	4.5						
			R		180	180		180						
32	1 1/4	42.7	t	2.3	2.4	3.2	3.5	3.6	4.5	4.9				
			R				250	250		200				
40	1 1/2	48.6	t	2.3	2.4	3.2	3.5	3.7	4.5	5.1				
			R				250	250		200				
50	2	60.5	t	2.3	2.8	3.2	3.8	3.9	4.9	5.5				
			R				300	300		300				
65	2 1/2	76.3	t	2.8	3.2	4.2	4.5	5.2	6.0	7.0				
			R			450		450		450				
80	3	89.1	t	2.3	2.8	3.2	3.5	4.2	4.5	5.5	6.6	7.6		
			R					450		450		450		
90	3 1/2	101.6	t	3.2	3.5	4.2	4.5	5.7	7.0	8.1				
			R			550		550		550				
100	4	114.3	t	2.8	3.5	4.5	4.9	6.0	7.1	8.6				
			R			600		600		600				
125	5	139.8	t	3.5	4.0	4.5	5.0	5.1	6.6	8.1	9.5			
			R			1200			1200		1200			
150	6	165.2	t	3.8	4.0	4.5	5.0	5.5	7.1	9.3	11.0			
			R				1500		1500		1500			
175	7	190.7	t	5.3										
			R	1500										
200	8	216.3	t	4.5	5.8	6.4	7.0	8.2	10.3	12.7				
			R		2000				3000	6000				
250	10	267.4	t	6.0	6.4	6.6	7.8	9.3	12.7	15.1				
			R			8000		6000		10000				
300	12	318.5	t	6.0	6.4	6.9	7.9	8.4	10.3	14.3	17.4			
			R			10000			6500		20000			
350	14	355.6	t	6.4	7.9	9.5	11.1	14.3	19.0	23.8				
			R		15000		7000							

※ 備考

※ 扁平により使用される許容があると思いますので担当者にお問い合わせ下さい